

Helium and Ground Temperature Surveys at Steamboat Springs, Colorado

by Kevin P. McCarthy, Josh. Been, G. M. Reimer, Gilbert Bowles,
and D.G. Murrey

DO NOT MICROFILM
COVER

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED



DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency Thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

DISCLAIMER

Portions of this document may be illegible in electronic image products. Images are produced from the best available original document.

DOE/ET/28365--21

DE84 012501

SPECIAL PUBLICATION 21

Helium and Ground Temperature Surveys at
Steamboat Springs, Colorado

Kevin P. McCarthy
Colorado Geological Survey

Josh Been, G. M. Reimer, C. Gilbert Bowles, and D. G. Murrey
U.S. Geological Survey

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Prepared by the
COLORADO GEOLOGICAL SURVEY
in cooperation with the
U.S. Dept. of Energy
Under Contract No. DE-AS07-77ET28365

Colorado Geological Survey
Department of Natural Resources
State of Colorado
Denver, Colorado
1982

NOTICE
PORTIONS OF THIS REPORT ARE ILLEGIBLE.
It has been reproduced from the best
available copy to permit the broadest
possible availability.

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

PURCHASE ORDER NO. 03X-00171
RECEIVED 6-7-84

NOTICE

This report was prepared to document work sponsored by the United States Government. Neither the United States nor its agent the United States Department of Energy, nor any Federal Employees, nor any of their contractors, subcontractors or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product or process disclosed, or represents that its use would infringe privately owned rights.

NOTICE

Reference to a company product name does not imply approval or recommendation of the product by the Colorado Geological Survey nor the U.S. Department of Energy to the exclusion of others that may be suitable.

ACKNOWLEDGMENTS

This work was performed in cooperation with the U.S. Dept. of Energy under contract number DE-AS07-77-28365. Michael Relf and Kevin Columbia assisted in temperature probe field work and provided valuable advice. The Colorado Geological Survey especially wishes to thank Josh Been, G. Michael Reimer, C. Gilbert Bowles and D.G. Murrey, Branch of Uranium and Thorium Resources, U.S. Geological Survey, Denver Federal Center, Denver, CO. for conducting the soil-helium survey.

This article was also published in the September issue of Geothermal Energy magazine.

CONTENTS

	PAGE
Acknowledgments.....	ii
Abstract.....	1
Introduction.....	1
Geology.....	1
Geothermal resource characteristics.....	2
Shallow temperature probes.....	2
Helium survey.....	6
Results and discussion.....	6
Conclusion.....	7
References.....	10

FIGURES

1. Orientation Map.....	3
2. Geology and survey sites at Steamboat Springs.....	4
3. Temperature contours (°C) and soil helium concentrations.....	9

TABLES

1. Helium analytical values.....	8
----------------------------------	---

Helium and Ground Temperature Surveys at
Steamboat Springs, Colorado

by

Kevin P. McCarthy, Josef Been*, G.M. Reimer*,
C. Gilbert Bowles*, and D. G. Murrey*

* U.S. Geological Survey

ABSTRACT

As demonstrated in Steamboat Springs, Colorado, helium and shallow temperature surveys are quick, inexpensive geothermal exploration methods that can be used together with excellent results in an urban environment. Steamboat Springs, in northwestern Colorado, lies primarily upon terrace gravels and alluvium with the major structure being a north-trending normal fault passing through the western portion of the city. Work by Christopherson (1979) indicates that the Steamboat warm springs are not laterally connected at shallow depth with Routt Hot Springs, 10 Km (6 mi.) to the north, although both resource areas are fault controlled. A shallow temperature survey was conducted in the city to determine the usefulness of this method to delineate a low temperature resource. Several extraneous factors influencing shallow temperature measurements were dealt with by field technique or subsequent analysis. A helium survey was conducted to compare with temperature results. Sixty-two soil helium samples were taken, using an interval of .1 to .2 Km (.06 to .12 mi.), twice the density of the 18 temperature probe stations. A mobile spectrometer allowed immediate analysis of helium samples. The contoured data from each method correlate well spatially and indicate that two faults control the resource in Steamboat Springs. Although these surveys should always be used to supplement other data, their utility in this study was readily apparent.

INTRODUCTION

Many effective methods have been perfected for geothermal exploration; however, some techniques cannot be used in an urban environment, and cost is often prohibitive. As demonstrated in Steamboat Springs, Colorado, helium and shallow ground temperature surveys are quick, inexpensive methods that can be used in fault controlled hydrothermal areas with excellent results, even in an urban setting. These methods may enhance results of adjacent geophysical surveys, and are best used after careful interpretation of surficial geology and ground water hydrology.

GEOLOGY

The city of Steamboat Springs, in northwestern Colorado, lies primarily upon Quaternary terrace gravels and alluvium. The major geologic structure in the immediate vicinity is a north-trending normal fault that passes through the western portion of the study area (Fig. 1). This fault is in turn offset by at least two northeast-trending right-lateral strike-slip faults (Snyder, 1977 and 1980). The ridge of Dakota Sandstone that is exposed along the trace of the normal fault is overturned from an easterly dip to the south to a westerly dip north of the transverse faults (Pearl and others, 1982). These transverse

faults may, in fact, be wrench faults common in the region as described by Stone (1969). General geology is shown in figure 2.

GEOHERMAL RESOURCE CHARACTERISTICS

About five hot springs, known as Routt Springs, are clustered in a small area about 10 Km (6 mi.) north of Steamboat Springs. Temperatures range from 51°C (124°F) to 66°C (151°F) and total discharge is about 3.2 l/s (50 gpm). The total dissolved solids content is low, about 539 mg/l (Barrett and Pearl, 1976). The springs issue from fracture zones within faulted Precambrian granitic and metamorphic rocks (Pearl, 1979).

Within the City of Steamboat Springs, several warm springs range in temperature from 20°C (68°F) to 40°C (104°F). Most of the springs are clustered along the river on the west side of the city, but Heart Spring to the east is a notable exception (Fig. 1). Heart Spring is the largest (8.8 l/s, 140 gpm), hottest (40°C, 104°F) spring with the best water quality (903 mg/l TDS) (Barrett and Pearl, 1976). All of the springs are high in sulphur.

Christopherson (1979), using gravity, audio-magneto tellurics, telluric profiling, and self-potential geophysical techniques in the area shown in figure 1, came to the following conclusions: (1) Although Steamboat and Routt Springs are both fault controlled, they are not connected laterally at shallow depth. (2) A low resistivity zone extends to a depth of about 1000 meters (3280 ft) below Routt Springs. (3) The Steamboat Springs are fault controlled. (4) Subsurface flow is controlled by subhorizontal faulting at depth associated with a prominent thrust fault. (5) Frequent tremors in the area are a possible mechanism for maintaining fault permeability.

SHALLOW TEMPERATURE PROBES

It is theoretically possible to determine spacial distribution of a subsurface heat source by near surface temperature measurements. This procedure has proven useful in delineating the extent of a secondary heat source in areas of near surface convective geothermal systems. Kintzinger (1956) reported excellent results in mapping temperatures measured at a depth of 1 meter in Lordsburg, New Mexico for defining a hot ground water system. Olmsted (1977) had good results from 1 meter deep temperature measurements in an area of near surface steam in Nevada. Friedman and Norton (1981) were able to define areas of anomalous heat flow at Yellowstone National Park by using the Pallman method of temperature determination at 2 meters depth. Flynn and others (1980), reported good correlation between 2 meter deep isotherms, local fault trends, and temperature measurements from thermal wells.

Several extraneous factors may influence near surface earth temperature. These factors include diurnal surface temperature effects, seasonal flux, erratic climate anomalies, micro climate (micro geography), soil and rock type, ground water damping effects, and vegetation. These factors may be dealt with qualitatively either by technique or subsequent analysis. Other, more subtle (in most areas of interest) temperature effects such as near surface oxidizing of sulphides, other exothermic reactions, or thermal pollution are interpreted as true heat source values.


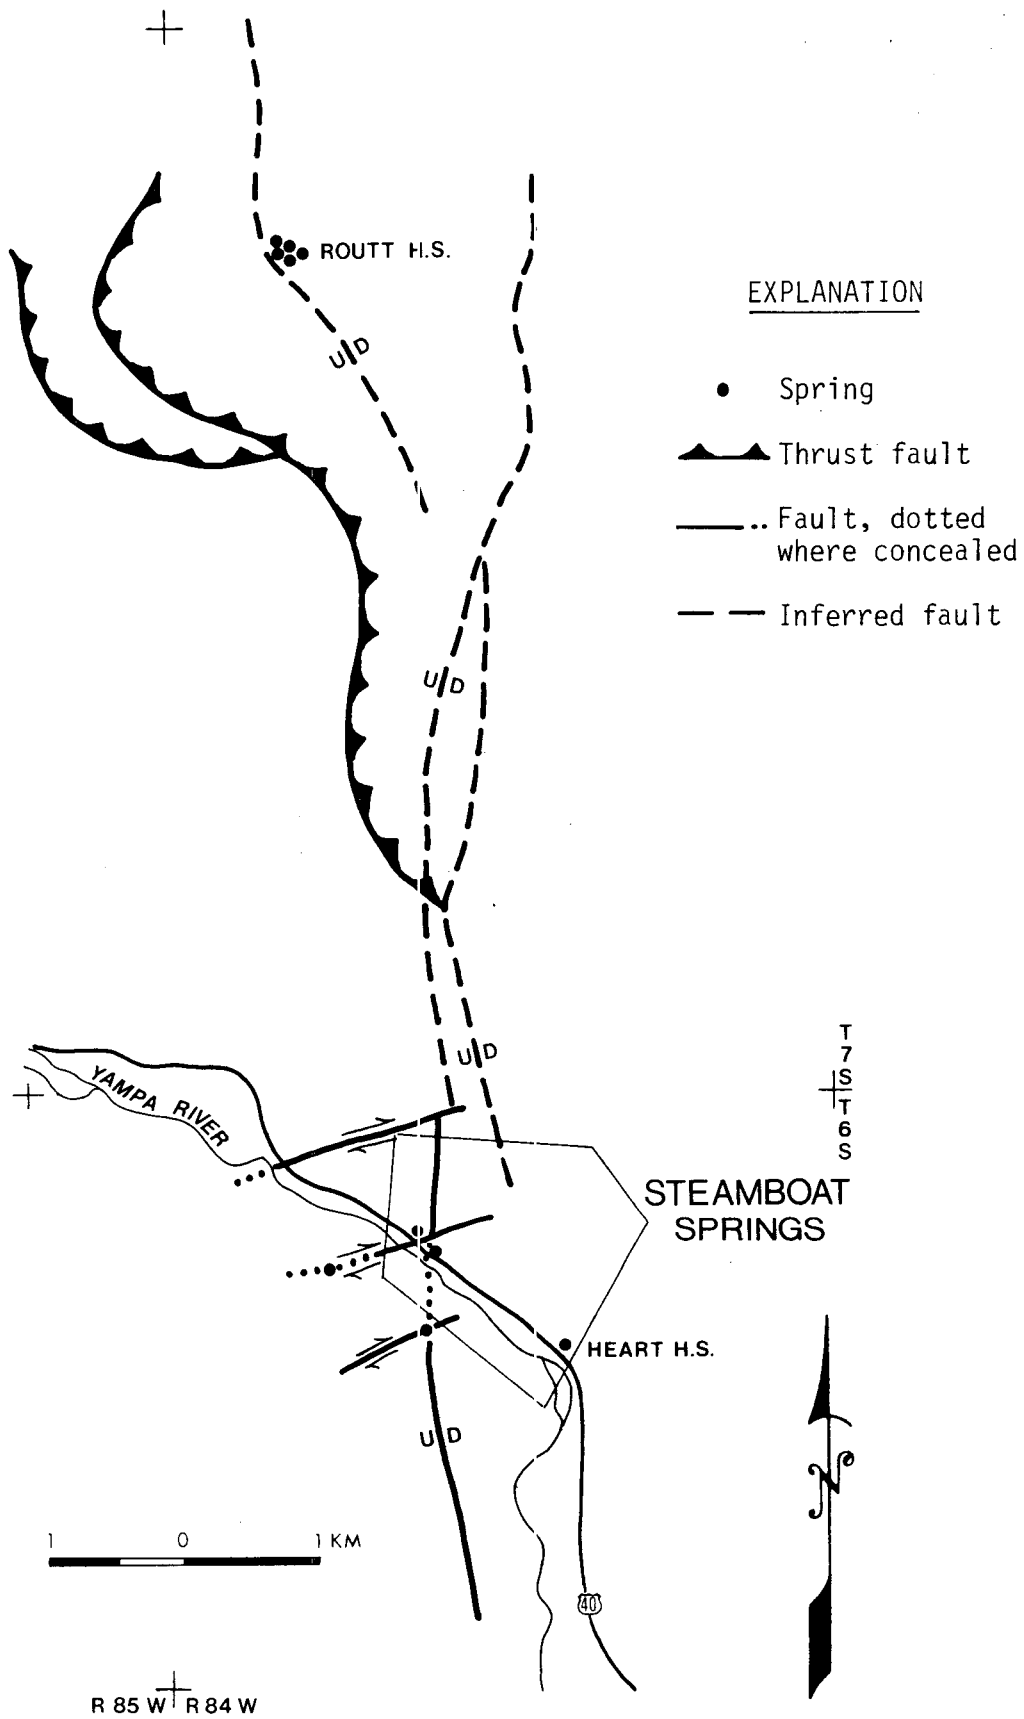


Figure 1. Orientation map (Adapted from Christopherson, 1979).

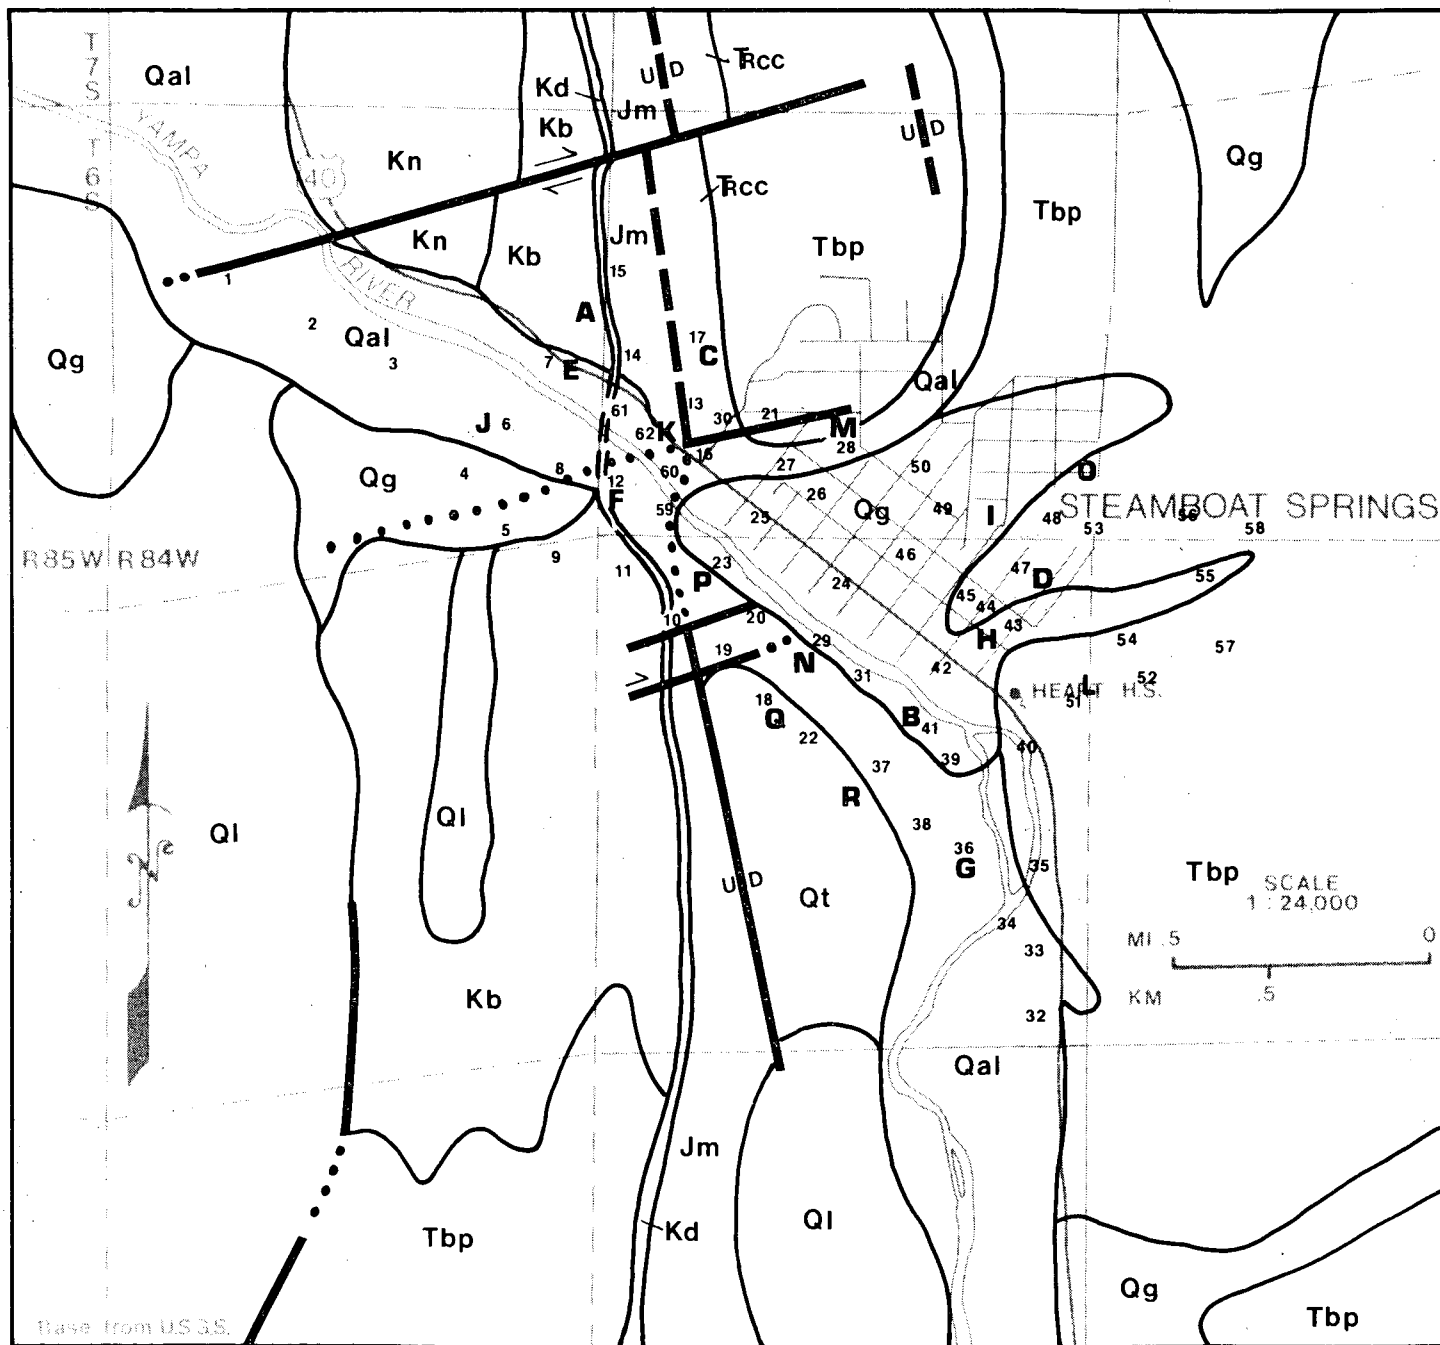

EXPLANATION

- Qg** Gravel
- Qt** Glacial Till
- Qal** Alluvium
- Ql** Landslide deposit
- Tbp** Browns Park Formation
- Kn** Niobrara Fm.
- Kb** Benton Shale
- Kd** Dakota Sandstone
- Jm** Morrison Fm.
- Rcc** Chinle and Chugwater Fm.
- 1-62 Helium sample sites
- A-R** Temperature probe sites
- Fault; dashed where inferred, dotted where concealed

Figure 2. Geology and survey sites at Steamboat Springs (Geology adapted from Snyder 1977 and 1980).

It is generally agreed that the effects of daily surface temperature flux are negligible below 1 meter (Thompson, 1860, Lovering and Goode, 1963, Olmsted, 1977, Friedman and Norton, 1981). Installing, reading, and removing temperature probes in 1 to 3 days effectively mitigates the effects of seasonal or erratic climate variance. Micro-climate and other factors can be dealt with somewhat by recording surface temperature, slope orientation, elevation, soil type, geology, and vegetation present at each site. Correlation of each of these effects to results of the survey can be made to modify interpretation if necessary.

Probably the greatest single factor distorting shallow temperature data is ground water. Shallow, unconfined aquifers are generally warmer than dry soil in the winter, and cooler in the summer. Ground water considerably dampens temperature drift. Cartwright (1968) reported as much as a 2°C temperature anomaly attributed to shallow groundwater during shallow short term temperature surveys. Parsons (1970) found ground water in a permeable esker warmer than that from adjacent clay and till. The usefulness of shallow temperature measurements to locate near surface ground water was demonstrated by Birman (1969), who concluded that increasing temperature is proportional to increasing depth to groundwater. This temperature change could be considered negligible where depth to ground water is very consistent, or greater than 75 m (225 ft). The effect of this variable can be determined where local well data is available.

The shallow temperature survey is more an effective measure of geothermal convection, rather than conduction. Most successful results have been obtained near fault zones, and high temperature surface features. Ideally, the best area to apply this technique should have high temperature surface manifestations present, uniform soil type, geology and vegetation, a deep or uniform water table, relatively flat topography, and invariable climate. Olmsted (1977) considers near surface heat flow of at least several thousand times background to be ideal. Basin and Range-type geothermal sites in the southwestern United States are well suited to this procedure.

A shallow temperature survey was conducted at Steamboat Springs to determine the usefulness of this method in a marginal area. The temperature probes used consist of thermistors epoxied to tapered 1.9 cm (.75 in) diameter maple dowels. The 3.08 cm (2 in) long dowels are fastened to 1.52 m (5 ft) PVC pipe. This probe construction was advised by the Nevada Bureau of Mines and Geology (Tom Flynn, oral comm., 1981).

Station intervals were .4 Km (.24 mi.) in a NW line, and .2 Km (.12 mi.) in a NE trend to coincide with streets (Fig. 2). Most probes were emplaced by augering a 5 cm (2 in.) diameter hole to 1.52 m (5 ft.) depth with a soil auger. Some probes had to be emplaced by drilling 10.16 cm (4 in.) holes with a power auger. Some intended sites had to be abandoned or moved due to rocky soil and a few probes were emplaced at only four foot depths. Most probes were left in the ground for 24 hours, while others were left for up to 72 hours to determine if further temperature change would occur with time.

Temperatures were recorded to an accuracy of $\pm .1^{\circ}\text{C}$ with an Electrotherm IT 610 digital thermometer. For each site the following variables were recorded: probe depth, geology, elevation, distance from nearest spring, distance from river, slope orientation, surface temperature, time emplaced, thermister reading, and other remarks. Soil type, vegetation present, and estimated soil moisture should also be recorded at each site.

HELIUM SURVEY

Helium is formed during the radioactive decay of uranium. Anomalous concentrations of helium occurring in groundwater or soil gas may indicate the presence of uranium, hydrocarbons, or geothermal energy (Reimer, 1976). As a geothermal exploration tool, soil helium has advantages of being detectable at distance from the source, and being present in extremely high concentrations over the source. The usefulness of this exploration technique has been well documented (Westcott, 1980, Denton, 1976, 1977, Hinckle, 1980, Mazor, 1974, Roberts, 1975, et. al., 1975). Abrupt helium values were obtained near Idaho Hot Springs, Colorado by Roberts and others (1975).

Two factors may influence soil helium values: diurnal effects and hydraulic gradient. The diurnal fluctuation of soil helium concentrations generally does not exceed 20 ppb, which is insignificant when compared to anomalies at geothermal sites, which are commonly well over 100 times this value. Since helium may be transported by water, anomalous concentrations may be slightly shifted down hydraulic gradient, and may be compensated for by comparing values to results of other exploration methods, or by evaluating subsurface ground water conditions.

A helium survey was conducted at Steamboat Springs to compare with temperature results. Soil helium samples were taken near each temperature probe site, as well as 44 other sites, using a sampling grid twice as dense as the temperature probe survey (Fig. 2). Sample sites were .1 to .2 Km (.06 to .12 mi.) apart. Analytical equipment consisted of a mobile helium "sniffer" (Dupont Spectrometer 120SSA) mounted in a crewcab pickup truck (Reimer, 1976). Sensitivity in analyzing the samples is 10 ppb. Gas samples were collected by pounding a 3/4 meter (2.46 ft) hollow probe into the ground and extracting 10 cm soil-gas sample with a disposable plastic syringe. Samples were then analyzed by the mobile unit the same day.

RESULTS AND DISCUSSION

Recorded temperatures ranged from 11.3°C to 18.6°C (52.3 to 65.5°F) (Table 1). Probes left emplaced for 72 hours showed a maximum temperature change of +.2°C (+.1°F). One probe (K) left in for 48 hours showed a temperature increase of 1.6°C (.9°F) over 24 hours, while another (R) increased .7°C (.4°F) over the same period. The former change can be attributed to close proximity to a warm spring, while the latter fluctuation is unexplained. All other probes stabilized within one hour, and no other temperatures could be directly related to spring proximity. There was apparently little effect by the recorded variables, as no correlation between the results and each effect could be substantiated.

Local water conservation official Wes Signs, with the Colorado Division of Water Resources, indicated that groundwater within the alluvium in the study area is probably at a consistent, shallow depth. Although cold groundwater probably affected the near surface temperature to a minor degree, it was assumed that the trends shown by mapped isotherms cannot be attributed to variations in groundwater proximity.

Helium results are plotted with isotherms in figure 3. Table 1 shows values of He and temperature for each corresponding site. A direct correlation

of temperature to helium value at each site is not valid due to a slight shifting of helium concentration caused by the solubility of the gas in the warm waters. Helium anomalies tend to be down hydraulic gradient from the temperature anomalies. The most easterly helium anomaly probably reflects heat flow to the north, beyond the temperature stations. Lower helium values over the southeastern temperature high could be due to dilution near the river. The extremely low helium value at station 6 is not considered valid due to observed petroleum contamination at the site. Helium may have been purged at station 6 by evolving carbon dioxide, methane, or other gases.

Comparing figure 3 to the geology shown in figure 2, it can be seen that the highest temperature and helium values correspond to both the westernmost normal fault, and an extension of a more easterly inferred fault. The data indicates that these faults control the geothermal resource in Steamboat Springs.

CONCLUSION

Although the results here only confirm what could reasonably be interpreted from surface geology, this survey proves the usefulness of these two techniques. Both methods are measures of thermal convection primarily, and correlation should be consistent. Although these surveys should always be used in conjunction with other methods where possible, their utility in tandem is beyond question here.

Table 1

He values (ppb) with
respect to air (5240 ppb)

Temperature values compared
with interpolated helium
values
(°C) (ppb-5240)

1.	0	25.	29	49.	49	A.	18.6	50
2.	0	26.	741	50.	3694	B.	18.6	20
3.	-20	27.	39	51.	60	C.	17.7	10
4.	60	28.	-78	52.	80	D.	17.7	55
5.	60	29.	20	53.	20	E.	17.2	70
6.	-1199 *	30.	68	54.	20	F.	16.4	80
7.	68	31.	0	55.	80	G.	16.4	5
8.	59	32.	50	56.	20	H.	16.1	1000
9.	40	33.	20	57.	20	I.	15.9	50
10.	440	34.	40	58.	50	J.	15.8	-1000 *
11.	60	35.	70	59.	510	K.	15.2	76000
12.	98	36.	0	60.	4275	L.	15.1	60
13.	254	37.	-20	61.	22800	M.	13.7	0
14.	59	38.	-20	62.	76950	N.	13.4	25
15.	39	39.	0			O.	13.1	65
16.	107	40.	40			P.	12.6	12
17.	0	41.	40			Q.	12.6	-40
18.	-40	42.	90			R.	11.3	-15
19.	20	43.	39					
20.	50	44.	1073					
21.	20	45.	263					
22.	0	46.	312					
23.	10	47.	59					
24.	39	48.	78					

-
X = 15.4°C
S = 2.2°C

*contaminated

REFERENCES

- Barrett, J. K., and Pearl, R. H., 1976, Hydrogeological data of thermal springs and wells in Colorado: Colorado Geol. Survey Inf. Series 6, 124 p.
- Birman, J. H., 1969, Geothermal exploration for ground water: Geol. Soc. America Bull., v. 80, p. 617-630.
- Cartwright, K., 1968, Temperature prospecting for shallow glacial and alluvial aquifers in Illinois: Illinois State Geol. Survey Circ. 433, 41 p.
- Christopherson, K. R., 1979, A geophysical study of the Steamboat Springs, Colorado geothermal systems: Unpublished M.S. Thesis, University of Colorado, Dept. of Geology, 107 p.
- Denton, E. H., 1976, Helium sniffer field test: Newcastle, Utah, 10-26 March 1976, U.S. Geol. Survey Open-File Report 76-421, 5 p.
- _____, 1977, Helium sniffer field test: Roosevelt Hot Springs, Utah, October 1975 and March 1976, U.S. Geol. Survey Open-File Report 77-606, 6 p.
- Flynn, T., Koenig, B. A., Trexler, D. T., and Bruce, J. L., 1980, Area specific investigations of three low- to moderate-temperature geothermal resources areas in Nevada, in Geothermal Energy for the Eighties: Transactions of the Geothermal Resources Council Annual Meeting, Salt Lake City, Utah: Geothermal Resources Council, Davis, CA, p. 41-45.
- Friedman, I., and Norton, D. R., 1981, Ground temperatures in and near Yellowstone National Park, in Ground Temperature Measurements: U.S. Geol. Survey Prof. Paper 1203, p. 23-29.
- Hinkle, M. E., 1980, Survey of helium in soils and soil gases and mercury in soils at Roosevelt Hot Springs KGRA, Utah: U.S. Geol. Survey Open-File Report 80-613, 31 p.
- Kintzinger, 1956, Geothermal survey of hot ground near Lordsburg, New Mexico: Science, v. 124, p. 629.
- Lovering, T. S., and Goode, H. D., 1963, Measuring geothermal gradients in drill holes less than 60 feet deep, East Tintic district, Utah: U.S. Geol. Survey Bull. 1172, 48 p.
- Mazor, E., 1974, Atmospheric and radiogenic noble gases in thermal waters: their potential application to prospecting and steam production studies, in Proceedings of the United Nations Symposium on the Development and Use of Geothermal Resources, p. 793-802.
- Miller, A. E., 1975, Geologic, energy, and mineral resource maps of Routt County, Colorado: Colorado Geol. Survey Map Series 1, 2 pls.

- Olmsted, F. H., 1977, Use of temperature surveys at a depth of 1 meter in geothermal exploration in Nevada: U.S. Geol. Survey Prof. Paper 1044-B, 25 p.
- Parsons, M. L., 1970, Ground water thermal regime in a glacial complex: Water Resources Research, v. 6, no. 6, p. 1701-1720.
- Pearl, R. H., 1979, Colorado's hydrothermal resource base - an assessment: Colorado Geol. Survey Resource Series 6, 144 p.
- Pearl, R. H., Zacharakis, T. G., and Ringrose, C.D., 1982, Geothermal resource assessment of Steamboat Springs, Colorado: Colorado Geol. Survey Resource Ser. 22.
- Reimer, G. M., 1976, Design and assembly of a portable helium detector for evaluation as a uranium exploration instrument: U.S. Geol. Survey Open-File Report 76-389, 18 p.
- Roberts, A. A., 1975, Helium surveys over known geothermal resource areas in the Imperial Valley, California: U.S. Geol. Survey Open-File Report 75-427, 6 p.
- Roberts, A. A., Friedman, I., Donovan, T. J., Denton, E. H., 1975, Helium survey, a possible technique for locating geothermal reservoirs: Geophysical Research Letters, v. 12, no. 6, p. 209-210.
- Snyder, G., 1977, Geologic map of the northernmost Gore Range and southernmost Northern Park Range, Grand, Jackson, and Routt Counties, Colorado: U.S. Geol. Survey Open-File Report 77-189.
-, 1980, Geologic map of the central part of the Northern Park Range, Jackson and Routt Counties, Colorado: U.S. Geol. Survey Misc. Inv. Series Map I-1112.
- Stone, D. S., 1969, Wrench faulting and Rocky Mountain tectonics: The Mountain Geologist, v. 6, no. 2, p. 67-69.
- Thompson, W., 1860, On the reduction of observations of underground temperature; with application to Professor Forbes' Edinburgh observations, and the continued Carlton Hill Series, in Transactions of the Royal Society of Edinburgh, v. 22, p. 405-427.
- Westcott, E. M., 1980, Helium and mercury in the Central Seward Peninsula Rift System, in Glenwood Springs Technical Conference Proceedings, Volume 1: Earth Science Laboratory, University of Utah Research Institute Report #ESL-59.

- Special Pub. 10, HYDROGEOLOGICAL AND GEOTHERMAL INVESTIGATIONS OF PAGOSA SPRINGS, COLORADO, by M.A. Galloway WITH A SECTION ON MINERALOGICAL AND PETROGRAPHIC INVESTIGATIONS OF SAMPLES FROM GEOTHERMAL WELLS 0-1 AND P-1, PAGOSA SPRINGS, COLORADO, by W.W. Atkinson, 1980, 95 p. \$10.00
- Special Pub. 16, GEOTHERMAL RESOURCE ASSESSMENT OF WAUNITA HOT SPRINGS, COLORADO, ed. by T. G. Zacharakis, 1981, 69 p., Free over the counter.
- Special Pub. 18, GROUNDWATER HEAT PUMPS IN COLORADO, AN EFFICIENT AND COST EFFECTIVE WAY TO HEAT AND COOL YOUR HOME, by K.L. Garing and F.R. Connor, 1981, 32 p., Free over the counter.
- Special Pub. 20, INDUSTRIAL MARKET OPPORTUNITIES FOR GEOTHERMAL ENERGY IN COLORADO, by B.A. Coe, 1982, Free over the counter.
- Map Series 14, GEOTHERMAL RESOURCES OF COLORADO, by R.H. Pearl, Scale 1:500,000, Free over the counter.
- Map Series 18, REVISED HEAT FLOW MAP OF COLORADO, by T.G. Zacharakis, Scale 1:1,000,000, Free over the counter.
- Map Series 20, GEOTHERMAL GRADIENT MAP OF COLORADO, by F.N. Repplier and R.L. Fargo, 1981, Scale 1: 1,000,000, Free over the counter.
- Info. Series 4, MAP SHOWING THERMAL SPRINGS, WELLS, AND HEAT FLOW CONTOURS IN COLORADO, by J.K. Barrett, R.H. Pearl and A.J. Pennington, 1976, Scale 1:1,000,000, out of print.
- Info. Series 6, HYDROGEOLOGICAL DATA OF THERMAL SPRINGS AND WELLS IN COLORADO, by J.K. Barrett and R.H. Pearl, 1976, 124 p. \$4.00
- Info. Series 9, GEOTHERMAL ENERGY DEVELOPMENT IN COLORADO, PROCESSES, PROMISES AND PROBLEMS, by B.A. Coe, 1978, 51 p., \$3.00
- Info. Series 15, REGULATION OF GEOTHERMAL ENERGY DEVELOPMENT IN COLORADO, by B.A. Coe and N.A. Forman, 1980, Free over the counter.
- Open-File Report 80-10, GEOTHERMAL POTENTIAL IN CHAFFEE COUNTY, COLORADO, by F.C. Healy, 47 p., Free over the counter.
- Open-File Report 80-11, COMMUNITY DEVELOPMENT OF GEOTHERMAL ENERGY IN PAGOSA SPRINGS, COLORADO, by B.A. Coe, 1980, Free over the counter.
- Open-File Report 80-12, TEMPERATURE-DEPTH PROFILES IN THE SAN LUIS VALLEY AND CANON CITY AREA, COLORADO, by C.D. Ringrose, Free over the counter.
- Open-File Report 80-13, GEOTHERMAL ENERGY POTENTIAL IN THE SAN LUIS VALLEY, COLORADO, by B.A. Coe, 1980, 44 p., Free over the counter.
- Open-File Report 81-1, GEOTHERMAL ENERGY OPPORTUNITIES AT FOUR COLORADO TOWNS, by B.A. Coe and Judy Zimmerman, 1981, Free over the counter.
- Open-File Report 81-3, APPENDICES OF AN APPRAISAL FOR THE USE OF GEOTHERMAL ENERGY IN STATE-OWNED BUILDINGS IN COLORADO: SECTION A, Alamosa; SECTION B, BUENA VISTA; SECTION C, BURLINGTON; SECTION D, DURANGO; SECTION E, GLENWOOD SPRINGS; SECTION F, STEAMBOAT SPRINGS, 1981, \$1.50 each or \$8.00 for the set.
- Pamphlet, GEOTHERMAL ENERGY-COLORADO'S UNTAPPED RESOURCE, Free over the counter.

In addition to the above charges there is an additional charge for all mail orders. Contact the Colorado Geol. Survey for exact amount. To order publications specify series and number, title and quantity desired. Prepayment is required. Make Checks payable to: Colorado Geological Survey, Rm. 715, 1313 Sherman St., Denver, Colorado 80203 (303/866-2611).

GEOTHERMAL ENERGY PUBLICATIONS--

Following is a list of publications relating to the geothermal energy resources of Colorado published by the Colorado Geological Survey.

- Bull. 11, MINERAL WATERS OF COLORADO, by R.D. George and others, 1920, 474 p., out of print.
- Bull. 35, SUMMARY OF GEOLOGY OF COLORADO RELATED TO GEOTHERMAL ENERGY POTENTIAL, PROCEEDINGS OF A SYMPOSIUM ON GEOTHERMAL ENERGY AND COLORADO, ed. by R.H. Pearl, 1974, \$3.00
- Bull. 39, AN APPRAISAL OF COLORADO'S GEOTHERMAL RESOURCES, by J.K. Barrett and R.H. Pearl, 1978, 224 p., \$7.00
- Bull. 44, BIBLIOGRAPHY OF GEOTHERMAL REPORTS IN COLORADO, by R.H. Pearl, T.G. Zacharakis, F.N. Repllier and K.P. McCarthy, 1981, 24 p., \$2.00.
- Resource Ser. 6, COLORADO'S HYDROTHERMAL RESOURCE BASE--AN ASSESSMENT, by R.H. Pearl, 1979, 144 p., \$2.00.
- Resource Ser. 14, AN APPRAISAL FOR THE USE OF GEOTHERMAL ENERGY IN STATE OWNED BUILDINGS IN COLORADO, by R.T. Meyer, B.A. Coe and J.D. Dick, 1981, 63 p., \$5.00.
- Resource Ser. 15, GEOTHERMAL RESOURCE ASSESSMENT OF OURAY, COLORADO, by T.G. Zacharakis, C.D. Ringrose and R.H. Pearl, 1981, 70 p., Free over the counter.
- Resource Ser. 16, GEOTHERMAL RESOURCE ASSESSMENT OF IDAHO SPRINGS, COLORADO, by F.N. Repllier, T.G. Zacharakis, and C.D. Ringrose, 1982, Free over the counter.
- Resource Ser. 17, GEOTHERMAL RESOURCE ASSESSMENT OF THE ANIMAS VALLEY, COLORADO, by K.P. McCarthy, T.G. Zacharakis, and R.H. Pearl, in prep. 1982, Free over the counter.
- Resource Ser. 18, GEOTHERMAL RESOURCE ASSESSMENT OF HARTSEL, COLORADO, by K.P. McCarthy, T.G. Zacharakis and R.H. Pearl, in prep. 1982, Free over the counter.
- Resource Ser. 19, GEOTHERMAL RESOURCE ASSESSMENT OF WESTERN SAN LUIS VALLEY, by T.G. Zacharakis and C.D. Ringrose, in prep. 1982, Free over the counter.
- Resource Ser. 20, GEOTHERMAL RESOURCE ASSESSMENT OF CANON CITY AREA, COLORADO, by T.G. Zacharakis, C.D. Ringrose and R.H. Pearl, in prep. 1982, Free over the counter.
- Resource Ser. 22, GEOTHERMAL RESOURCE ASSESSMENT OF STEAMBOAT SPRINGS AREA, COLORADO, by K.P. McCarthy, T.G. Zacharakis and R.H. Pearl, in prep. 1982, Free over the counter.
- Resource Ser. 23, GEOTHERMAL RESOURCE ASSESSMENT OF HOT SULPHUR SPRINGS, COLORADO, by T.G. Zacharakis, K.P. McCarthy and C.D. Ringrose, in prep. 1982, Free over the counter.
- Resource Ser. 24, GEOTHERMAL RESOURCE ASSESSMENT OF RANGER HOT SPRINGS, COLORADO, by T.G. Zacharakis and R.H. Pearl, in prep. 1982, Free over the counter.
- Special Pub. 2, GEOTHERMAL RESOURCES OF COLORADO, by R.H. Pearl, 1972, 54 p. \$2.00.